

Change language:


## BMW TIS - 65 52 510 Removing and installing on-board monitor

65 52 510

Removing and installing on-board monitor





Pull off right wooden finisher.

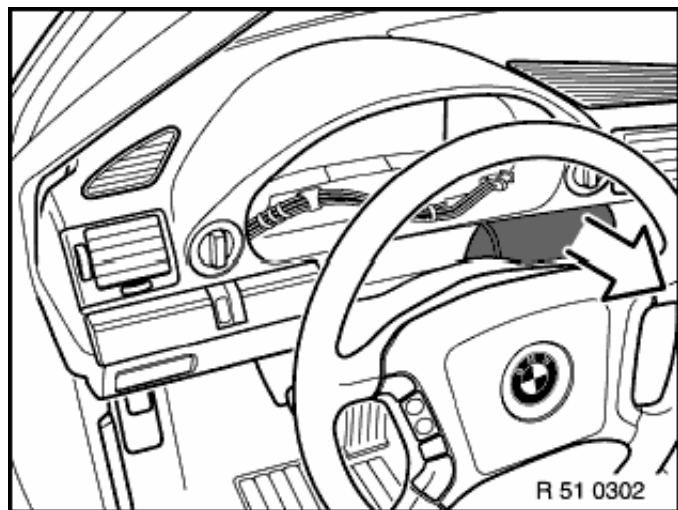


Remove top left wooden finisher by pulling upwards.

Unfasten left and right screw. Raise left and right levers with screwdriver and pull down finisher, then remove completely.

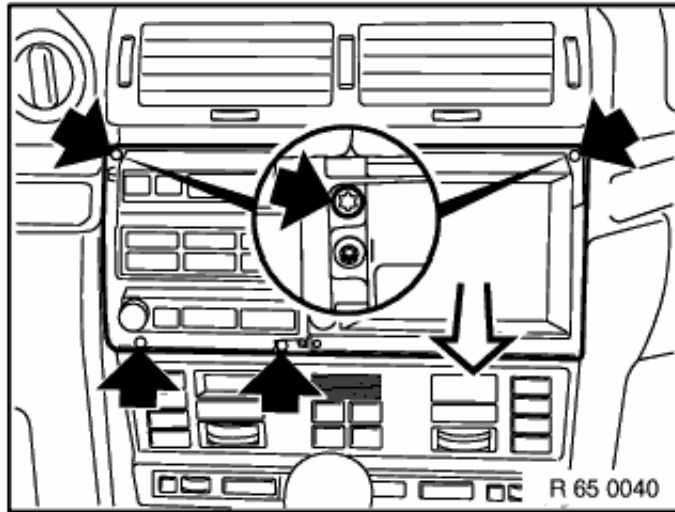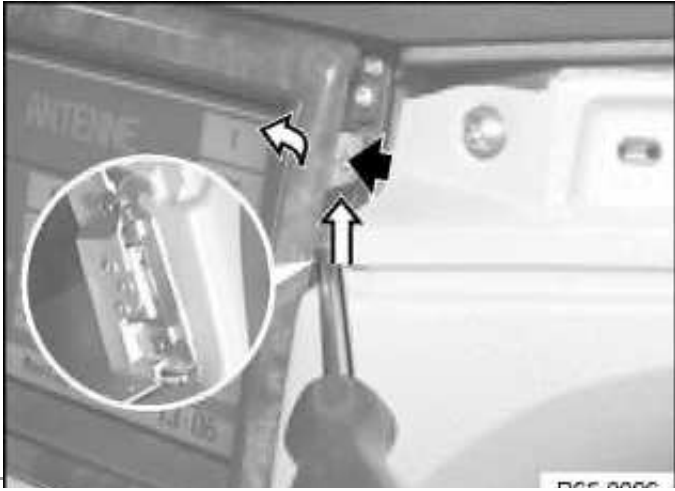

Unfasten screws.  
Pull out on-board monitor  
towards front.

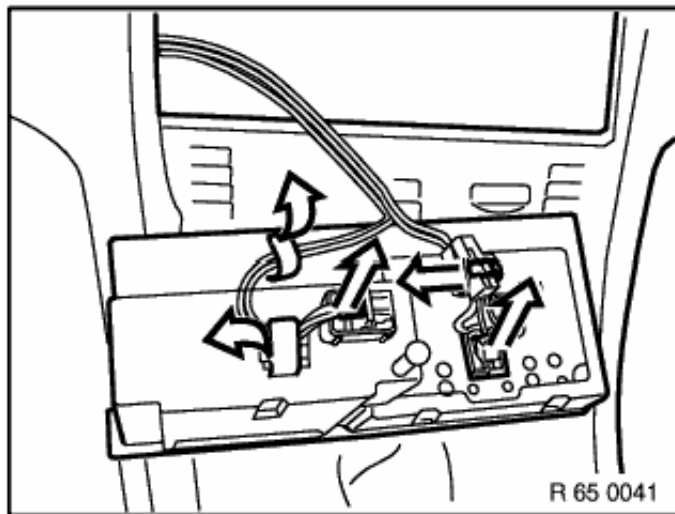

Remove plug and unfasten wiring  
harness from clips.